



PCT

WORLD INTELLECTUAL PROPERTY ORGANIZATION
International Bureau

INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification 7 : H04L 29/00		A2	(11) International Publication Number: WO 00/33532
			(43) International Publication Date: 8 June 2000 (08.06.00)
(21) International Application Number: PCT/US99/27722		(81) Designated States: AE, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CR, CU, CZ, DE, DK, DM, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, UZ, VN, YU, ZA, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).	
(22) International Filing Date: 22 November 1999 (22.11.99)			
(30) Priority Data: 09/203,551 1 December 1998 (01.12.98) US			
(71) Applicant: SUN MICROSYSTEMS, INC. [US/US]; 901 San Antonio Road, M/S: UPAL01-521, Palo Alto, CA 94303 (US).			
(72) Inventors: SWAMINATHAN, Viswanathan; 5006 Hildasve Terrace, Fremont, CA 94555 (US). FERNANDO, Gerard; 142 Waverly Place, Mountain View, CA 94040 (US). PALLIKONDA, Raghuvier; 2006 Klamath Avenue #8, Santa Clara, CA 95051 (US).			
(74) Agents: HECKER, Gary, A. et al.; Hecker & Harriman, 1925 Century Park East, Suite 2300, Los Angeles, CA 90067 (US).			


Published

Without international search report and to be republished upon receipt of that report.

(54) Title: METHOD AND APPARATUS FOR DELIVERY OF A BYTECODE EMBEDDED WITHIN A TRANSPORT STREAM

(57) Abstract

A method and apparatus for embedding of bytecode data in a transport stream is described. Embodiments of the invention serve to make Java™ bytecode (in a class file) concurrently available to a user that is receiving media information through a transport stream. To ensure the concurrent delivery of bytecode, the information is embedded within spaces allocated in the transport stream, or in packets that carry the media data. In one embodiment of the invention, media data is grouped in structured packets referred to as Packetized Elementary Stream (PES) packets. Predefined spaces are available in each PES packet where bytecode data is embedded. In one embodiment of the invention the pre-defined space is allocated within the header segment of PES packet. In another embodiment bytecode instructions are embedded within a private stream segment of a PES packet. One transport stream used with the invention is an MPEG-2 transport stream that includes structured packets that transport the PES packets. These transport stream packets, in turn, have within them predefined spaces. Bytecode data can also be embedded within spaces available in the transport stream. In an embodiment of this invention bytecode can be embedded in a transport stream header or a transport stream payload segment. In other embodiments, bytecode data is transmitted in the private stream segment and retransmission of bytecode is accomplished in other regions of the PES packet. In another embodiment, bytecode data is transmitted in an adaptation field and retransmitted data is sent as PES header private data.

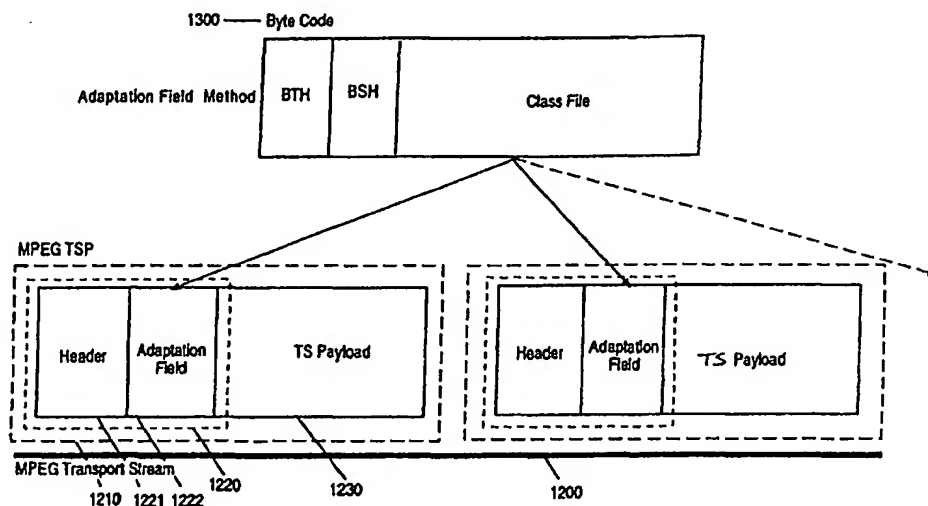

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece	ML	Mali	TR	Turkey
BG	Bulgaria	HU	Hungary	MN	Mongolia	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MR	Mauritania	UA	Ukraine
BR	Brazil	IL	Israel	MW	Malawi	UG	Uganda
BY	Belarus	IS	Iceland	MX	Mexico	US	United States of America
CA	Canada	IT	Italy	NE	Niger	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NL	Netherlands	VN	Viet Nam
CG	Congo	KE	Kenya	NO	Norway	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NZ	New Zealand	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	PL	Poland		
CM	Cameroon	KR	Republic of Korea	PT	Portugal		
CN	China	KZ	Kazakstan	RO	Romania		
CU	Cuba	LC	Saint Lucia	RU	Russian Federation		
CZ	Czech Republic	LI	Liechtenstein	SD	Sudan		
DE	Germany	LK	Sri Lanka	SE	Sweden		
DK	Denmark	LR	Liberia	SG	Singapore		
EE	Estonia						

METHOD AND APPARATUS FOR DELIVERY OF A BYTECODE EMBEDDED WITHIN A TRANSPORT STREAM

BACKGROUND OF THE INVENTION

5

A. FIELD OF THE INVENTION

This invention relates to the field of data communications. Portions of the disclosure of this patent document contain material that is subject to copyright protection.

10

The copyright owner has no objection to the facsimile reproduction by anyone of the patent document or the patent disclosure as it appears in the Patent and Trademark Office file or records, but otherwise reserves all copyright rights whatsoever. Sun, Sun Microsystems, the Sun logo, Solaris, SPARC, "Write Once, Run Anywhere", Java, JavaOS, JavaStation and all Java-based trademarks and logos are trademarks or registered trademarks of Sun Microsystems, Inc. in the United States and other countries.

15

B. BACKGROUND ART

One use of the Internet is to deliver media information (such as a movie or sound file) to a user. A problem with current media delivery schemes is that it is difficult to deliver any other data while the media data is being sent.

20

Sometimes it is desired to send media data and other data (like control data) at the same time, a process referred to as "concurrent delivery". Right now there is no suitable scheme for concurrent delivery of media and control data. The

25

problems associated with providing concurrent delivery of media data and control data can be understood by reviewing media delivery systems.

Media Delivery

5

In multimedia applications media data such as video or audio information is communicated from a server computer to a client computer (e.g. a user's computer at home or office) via a "transport stream". A transport stream consists of a series of bursts or packets of media data. Before the media data is transmitted, it is first prepared by converting it into a suitable format for transmission. A number of schemes (e.g., Motion Picture Experts Group (MPEG) standards, such as MPEG-1, MPEG-2, MPEG-4, etc.) are available for preparing media data (e.g., audio, video, etc.) for transmission as a media transport stream.

Media data is sometimes referred to as "time aware" or "time sensitive" data. This is because it is important or required that data be available at a certain rate and/or at a certain time. For example, when viewing a video stream, it is important that new video frames be available as needed to prevent gaps or choppiness in displayed video data. If the data of a movie is being sent too slowly, for example, the displayed movie image may freeze or go blank while the client computer waits for new movie data. Similarly, for audio data, new audio data must be provided continuously or there will be gaps during playback. These gaps may cause silence in the playback of the audio, causing the sound to be clipped or missing sounds and words. (Note that time aware data is not limited to media data. Time aware data is data that carries with it additional information representing timing relevant to the use of the data. For example, time aware data could include time stamps indicating deadlines by which the data should be processed).

In some circumstances, a control application is required to help play back the media data or to control the playback of the media data. In some cases such a control application is an applet or an application (such as a Java™ programming language applet or application). The applet is transmitted as
5 bytecode from a server to a user computer and the user computer uses the applet to control the playback of the media data. Bytecode or other serialized data or objects may need to be delivered to clients concurrently with the media information.

10

There is presently no effective mechanism available for delivery of bytecode instructions concurrently with media data. Typically, bytecode data is transported after all necessary media data is transmitted. That may be too late for some environments, where applets or control applications need to be
15 processed as soon as they become available. One prior art solution is to send the control application first, prior to transmitting the media or time aware data. However, this leads to unwanted delays in playback of the media data. The user is expecting to see video data, but instead has to wait until the control data is received. This delay is undesirable.

20

Therefore, there is a need for transport of bytecode instruction concurrently with media data rather than prior to or subsequent to transport of the media information.

SUMMARY OF THE INVENTION

A method and apparatus for embedding of bytecode data in a transport stream is described. Embodiments of the invention serve to make Java™

5 bytecode (in a class file) concurrently available to a user that is receiving media information through a transport stream. Bytecode information is embedded within spaces allocated in the transport stream, or in packets that carry the media data.

10 In one embodiment of the invention, media data is grouped in structured packets referred to as Packetized Elementary Stream (PES) packets. Bytecode data is embedded in predefined spaces in each PES packet. In one embodiment of the invention the pre-defined space is allocated within the header segment of a PES packet. In another embodiment bytecode instructions are embedded
15 within a private stream segment of a PES packet.

In other embodiments, bytecode data is transmitted in the private stream segment and retransmission of bytecode data is accomplished in other regions of the PES packet. In another embodiment, bytecode data is transmitted in an
20 adaptation field and retransmitted data is sent as PES header private data.

One transport stream used with the invention is an MPEG-2 transport stream that includes structured packets that transport the PES packets. These transport stream packets, in turn, have within them bytecode data embedded
25 within spaces in the transport stream. In an embodiment of this invention bytecode can be embedded in a transport stream header or a transport stream payload segment.

WO 00/33532

PCT/US99/27722

5

In embodiments of the invention, the embedding of information under the methods of this invention is accomplished so that an MPEG-2 compliant decoder is able to use the stream irrespective of whether or not the decoder takes advantage of the embedded bytecode information. Further, the transport stream is transmitted with minimum changes in bit-rate in terms of both length and frequency and is within the allowed maximum bandwidth. Embodiments of this invention may also define tune-in points at which a decoder can start decoding and presenting bytecode information.

BRIEF DESCRIPTION OF THE DRAWINGS

Figure 1 is an embodiment of a Java™ network application environment.

5 Figure 2 is a block diagram of an embodiment of a computer system capable of providing a suitable execution environment for an embodiment of the invention.

10 Figure 3 is a diagram illustrating a method of packetization, fragmentation, and transport of data according to one embodiment of the invention.

15 Figure 4 illustrates a method of embedding bytecode data within the adaptation field of a packet according to one embodiment of the invention.

 Figure 5 illustrates a method of embedding bytecode within the payload segment of an MPEG-2 transport stream packet according to one embodiment of the invention.

20 Figure 6 illustrates bytecode data embedded within the PES header of a PES packet.

DETAILED DESCRIPTION OF THE INVENTION

The invention provides a method and apparatus for embedding bytecode data within a transport stream. In the following description, numerous specific
 5 details are set forth in order to provide a more thorough understanding of the present invention. It will be apparent, however, to one skilled in the art, that the present invention may be practiced without these specific details. In other instances, well-known features have not been described in detail in order not to unnecessarily obscure the present invention.

10 This invention is described in connection with the transmission of media data to a client computer system. However, this is by way of example only. The invention has equal application to any device that can receive data, including set top boxes, personal digital assistants, smart appliances, telcom devices, financial terminals, or any other such device. In addition, the invention is not limited to
 15 media data, but has equal application to any form of data, including data related to electronic commerce.

Bytecode Data Transport In Media Data Transport Stream

20 The current invention provides for the concurrent delivery of media data and byte code data via a media data transport stream. The invention provides for embedding bytecode data in predefined spaces in the transport stream. When received, the bytecode data can be separated out and used to support playback or control of the received media data.

25

One existing technique known to the inventors for timely delivery of media streams is a method described in an application filed with the United

States Patent Office, titled METHOD AND APPARATUS FOR TIMELY
 DELIVERY OF A BYTECODE AND SERIALIZED OBJECTS STREAM, filed
 6/26/98, application number 09/105,963, incorporated by reference herein. The
 current method for delivery of bytecode information embedded in a transport
 5 stream can take advantage of a stream that has become time aware by the
 method disclosed in the aforesaid application.

In the present invention, the bytecode is embedded within the transport
 stream in such manner that the transfer rate frequency and maximum length
 10 remain stable. Bytecode information is imbedded in the transport stream such
 that a decoder is able to decode the media data portion of the stream even if the
 decoder cannot take advantage of the embedded bytecode information. In one
 embodiment of the invention the bytecode data is embedded in a media
 transport stream encoded using the MPEG-2 protocol. This embodiment is
 15 described below.

MPEG-2

Although the present invention has equal applicability to any type of
 20 transport stream, the invention is described by way of example in connection
 with transmission as part of an MPEG-2 transport stream.

Figure 3 is a diagram illustrating the process by which media data is
 transported through an MPEG-2 transport stream. The stream is comprised of
 25 transport stream packets (TSPs) that consist of a header and a data storage
 segment. The header also referred to as transport stream header (TS header)
 may include an optional "adaptation field". The data storage segment also
 referred to as transport stream payload (TS payload) is comprised of packetized

elementary stream (PES) packets. Each PES packets consists of a PES header and elementary stream data.

The transport stream is shown in Figure 4 from the perspective of a data
 5 source converted into PES packets and assembled into TSP packets. There is a source 1000 of media data, such as audio, video, image or other data that is to be transmitted to a client computer. To do this, media data 1000 is placed into one or more variable sized packages, referred to as Packetized Elementary Stream (PES) packets 1100. Each PES packet consists of two regions, a header region and
 10 a data region. The PES header 1110 is followed by "elementary stream data" 1120.

PES Header Region

15 The header region contains a PES header 1110. The PES header 1110 identifies the attributes of the data stored in the data region. Such attributes may include the type of data, the size of the data being transmitted, the start and end locations of the transmitted data, and possibly other information needed for interpretation of the transmitted data. For example, one embodiment of a PES
 20 header 1110 can comprise information representing the length of the header, the version, a flag denoting a class or an object, the number of required classes, a "start loading" time stamp, a "load by" time stamp, the size of the class, the type of compression being used, the type of security scheme being used, the type of error correction being used, other type information, the length of a class
 25 identifier (ID), a class identifier (ID), lengths of class ID's for each of the required classes, and class IDs for each of the required classes.

Media Data Region

The elementary stream data 1120 region contains elementary media data. The elementary data 1000 consists of all or a portion of the source data (i.e. audio
5 data, video data). The data may be compressed with appropriate identifying information in the PES Header 1110 for decompressing the elementary stream data 1120 (as needed).

Transport Stream

10

As noted above, the transport stream consists of TSP packets that consists of a header and a data storage segment. MPEG-2 transport stream 1200 is a multiplexed bit stream and a collection of individual MPEG-2 transport stream packets (MPEG-2 TSP) 1210. Each MPEG-2 TSP 1210 is of fixed length of 188
15 bytes, and includes a transport stream header (TS header) 1220 followed by a data storage segment (TS payload) 1230. (The TS payload consists of PES packets 1100).

TS Header 1220

20

The TS header contains information needed to receive and decode the MPEG-2 TSP's 1210. All the transport stream packets begin with the transport stream header (32 bits). This transport stream header contains a 13-bit Packet ID (PID) as shown in Table 1 below. Transport Stream packets of a single PID carry
25 data of one and only one elementary stream. The PID identifies, via Program Specific Information (PSI) tables, the contents of the data contained in the Transport Stream packet. There are four PSI tables carried in the Transport Stream namely, Program Association Table (PAT), Program Map Table (PMT),

Conditional Access Table (CAT), and Network Information Table (NIT). These tables contain the necessary information to demultiplex and present programs.

A program here is a collection of elementary streams which are to be presented synchronously. The program_number is the numeric label associated with a program. The program definition is carried as transport stream packets containing the program map table of that program. The Program Map Table, specifies among other information, which PIDs, and therefore which elementary streams are associated to each program. The Program Association Table provides the correspondence between a program_number and the Program Map Table. PMT also indicates the PID of the Transport Stream packets which carry the PCR (Program Clock Reference) for each program. The Conditional Access Table contains the scrambling information and the Network Information Table may give the network information, but its content is not defined by the standard.

Table 1: Transport Packet Syntax

Syntax	No. of bits
sync_byte	8
transport_error_indicator	1
payload_unit_start_indicator	1
transport_priority	1
PID	13
transport_scrambling_control	2
adaptation_field_control	2
continuity_counter	4

20 Adaptation Field

As noted above, the transport stream header may include an optional adaptation field. The Adaptation field control bits in the TSH indicate whether or

not there is an adaptation field and/or a payload. The adaptation field control values are described by Table 2 below:

Table 2: Adaptation Field Control Values

5

Value	Description
00	Reserved for future use by ISO/IEC
01	No adaptation_field, payload only
10	Adaptation_field only, no payload
11	Adaptation_field followed by payload

The adaptation field, when present, is described in Table 4 below:

Table 3: Transport Stream Adaptation Field (partial)

10

Syntax	No. of bits
adaptation_field_length	8
if(adaptation_field_length > 0){	
discontinuity_indicator	1
random_access_indicator	1
elementary_stream_priority_indicator	1
PCR_flag	1
OPCR_flag	1
splicing_point_flag	1
transport_private_data_flag	1
adaptation_field_extension_flag	1
if(transport_private_data_flag == '1'){	
transport_private_data_length	8
for(i=0; i<transport_private_data_length; i++){	
private_data_byte	8
}	
}	
for(i=0; i<N; i++){	
stuffing_byte;	8

PES Packet

The PES packet has the following structure as shown in Table 4:

5

Table 4: PES Packet (partial)

Syntax	No. of bits
packet_start_code_prefix	24
stream_id	8
PES_packet_length	16
if(stream_id!=program_stream_map && stream_id!= padding_stream && stream_id!= private_stream2 && stream_id!= ECM && stream_id!= EMM && stream_id!= program_stream_directory && stream_id!= DSMCC_stream && stream_id!= ITU-T Rec. H.222.1 type E stream){	
'10'	2
PES_extension_flag	1
if(PES_extension_flag == '1'){	
PES_private_data_flag	1
if(PES_private_data_flag == '1'){	
PES_private_data	128
}	
}	

Private Data

10

The MPEG-2 transport stream is capable of carrying user data. The user data can be stuffed as private data in the adaptation field of the transport header of a packet. It can be delivered as a private elementary stream of a program. It can also be delivered as private data in the PES header of the transport stream. The MPEG-2 also allows private data to be sent in Transport Stream packets with a PID value designated as a Program Map Table PID in the Program Association Table.

15

The present invention includes embodiments that take advantage of the ability to deliver private data in a transport stream to embed bytecode for delivery.

5 Embedding Bytecode Data

Transport of bytecode and other user data in the MPEG-2 transport stream is accomplished by embedding the data in different segments of the packets. Embodiments include (1) embedding data as private data in the
10 adaptation field 1222 of TS header 1220 (i.e., header) of an MPEG-2 TSP 1210, (2) embedding data as private data in the TS payload 1230 (i.e., data storage segment) of an MPEG-2 TSP 1210, (3) transporting data as a private elementary stream included in PES header 1110 of a PES packet 1100 and, (4) transporting data using a combination of the above enumerated methods.

15

1. Adaptation Field Method

As illustrated in Figure 4, in an embodiment of the invention, bytecode data can be packaged as private data in the adaptation field 1222 (included in
20 header 1220) of an MPEG-2 TS packet. To maximize the data in each packet, MPEG-2 TS packets 1210 may be sent with no TS payload 1230. When the adaptation_field_control field is 10 the adaptation field 1222 length will be 183 bytes. A total of 181 bytes of bytecode data may be embedded in such an MPEG-2 TS packet 1210. Because the packet length is fixed to a maximum of 188
25 bytes in this embodiment of the invention, the bit rate remains constant and retransmission and tune-in times can be computed.

The PCR PID Transport Stream packets that contain the PCR information of a program have a minimum normative rate. This defines the maximum interval of these PCRs in the stream. However, additional packets carrying bytecode data can be inserted as PCR PID packets. These packets are introduced

5 at a rate calculated using a Tune-in time and the bandwidth required for the bytecode data stream. When the adaptation_field__control flag is '10, the value of the adaptation_field_length shall be 183 (4 bytes for the rest of the transport stream header and 1 byte for the adaptation_field_length). A total of 181 bytecode data bytes can be sent in such a packet as 1 byte is used for other

10 adaptation field flags and the private data length is specified using 1 byte.

Referring again to Figure 6, the bytecode packets begin with a bytecode transport header 601 and a bytecode stream header 602. In an embodiment of this invention a bytecode transport header 601 may contain the following data:

15

Version (V) (2 bits)
 Future Use (2 bits)
 Next Tune-in time (64 bits)
 Next Retransmission time (60 bits)

20

"Next tune in time" is the next tune-in point from where a decoder can start decoding. This marks the beginning of the retransmission of all the classes /objects necessary for a session. In an MPEG-2 implementation this time is measured in ticks of a 90 megahertz clock. The number of ticks are measured

25 from the beginning of the session. All zeros are used to indicate that the tune-in time is undefined.

Next retransmission time is the time of the next retransmission for a class/object. This time is measured in ticks of a 90 Megahertz clock. All zeros are used to indicate that the tune-in time is undefined. This field is made for 32 bit alignment. This reflects the next retransmission of the TS payload 1230 in the same channel. If the normal and retransmission channels are different, a class file may be retransmitted in the normal channel for tune-in at a time earlier than the next retransmission time.

2. Payload Method

The user data can also be sent as a private elementary stream of a program. MPEG-2 permits two private elementary stream types, Private_Stream1/Private_Stream2. These differ in the format of the PES header carried in these streams.

The bytecode data can be sent as private data of type Private_Stream2 with a Java Stream Header or any other equivalent as the private stream PES header. As illustrated in Figure 5, in another embodiment of the invention, bytecode data can be packaged as data in the TS payload 1230 (data storage segment) of an MPEG-2 TS packet. Where insufficient elementary stream data are available to be defragmented into the TS payload 1230 segment of the MPEG-2 transport stream 1200, bytecode data can be substituted instead.

3. PES Header Method

The MPEG-2 PES format for the elementary streams of certain stream types have fields for private data to be sent in the PES Header. Sixteen bytes of bytecode data can be sent as private data in each PES header when the

PES_private data flag is set in the PES header. The PES headers appear only at the beginning of a PES packet and each PES packet is split into multiple transport stream packets. Therefore, not all the transport stream packets of that PID carry PES headers. This technique of delivering user data can be used when the
5 information to be sent does not require much bandwidth. In this case, the bit rate may change slightly.

As illustrated in Figure 8, bytecode data is embedded within the PES header 1110 of a PES packet 1100. The MPEG-2 PES format for the elementary
10 streams of certain stream types have fields for private data to be sent in the PES header 1110. Sixteen (16) bytes of Bytecode data can be transported as private data in each PES header 1110 when the PES_private data flag is set.

PES headers 1110 appear only at the beginning of a PES packet 1100. As a
15 part of fragmentation of the PES packets 1100, each packet is split into multiple MPEG-2 TS packets 1210. Therefore, not all the MPEG-2 TS packets 1210 within the MPEG-2 transport stream 1200 may carry a PES header 1110.

4. Hybrid Methods of Bytecode Data Transport for Transmission and 20 Retransmission

In other embodiments of the invention, a combination of the aforesaid methods may be used. The combination techniques provide opportunity for retransmission of bytecode data without affecting the delivery rate of the
25 originally transmitted bytecode data or of the media data.

The transport stream multiplexer maintains a constant rate at which the packets are delivered. The transport stream packets which carry the PES packets

and other information are stuffed with bytecode data using predefined stuffing bytes in the adaptation field to maintain a constant bit rate. Stuffing is also done when there is insufficient PES packet data to completely fill the transport stream packet payload bytes. In this method, the normal transmission of bytecode data

5 is done using the private stream method (described above) while the retransmission of the same bytecode data can be achieved by replacing the above mentioned stuffing bytes. The retransmission is thus achieved at zero bandwidth increase and the bit rate can be maintained constant.

10 Another technique employs the adaptation field method for normal transmission of the bytecode data. The retransmission of the same bytecode data is sent as the PES header private data. The normal transmission is done in the adaptation field to ensure that all the data can be sent at a fixed rate. The retransmission is done using the PES header so that the bandwidth is not
15 increased considerably.

Another scheme combines the private stream technique and the PES header technique. The retransmission of bytecode data is done as the PES header private data as in the above technique but the normal transmission of
20 bytecode data is using the private stream method.

Error Correction

The hybrid schemes described above provide the ability for
25 retransmission. Because loss of any transport stream packet may result in corruption of the bytecode data, a retransmission policy is implemented to resubmit any lost packets. One possible approach involves retransmission of the entire class at regular intervals in the absence of a back channel. This helps to

facilitate random access points in the case of media. However, this may not be possible when the number of clients is too high or when the class (or object) is very large, making retransmission prohibitive.

5 When a back channel is present packet loss can be signaled to the server, and the lost packet can be retransmitted. When a reliable multicast scheme is used, the data can also be retransmitted from places other than the server.

10 There are a number of error resilient schemes with built in redundancy available for recovering from a partial packet loss. For example, schemes like forward error correction can be used. The packet loss problem can also be partially solved by using some reliable multicast scheme. Embodiments of the invention facilitate the use of any error resilience or any reliable multicast algorithm to overcome packet loss.

15

The environment that provides the means for operation of the methods of this invention includes embodiments in forms of hardware systems, software components, and data structures that can be understood by considering the following description. Reviews of a hardware embodiment, object oriented programming, and the Java™ programming language are provided below.

20

Object-Oriented Programming

25 Object-oriented programming is a method of creating computer programs by combining certain fundamental building blocks, and creating relationships among and between the building blocks. The building blocks in object-oriented programming systems are called "objects." An object is a programming unit that groups together a data structure (one or more instance

variables) and the operations (methods) that can use or affect that data. Thus, an object consists of data and one or more operations or procedures that can be performed on that data. The joining of data and operations into a unitary building block is called "encapsulation."

5

An object can be instructed to perform one of its methods when it receives a "message." A message is a command or instruction sent to the object to execute a certain method. A message consists of a method selection (e.g., method name) and a plurality of arguments. A message tells the receiving object what operations to perform.

10

One advantage of object-oriented programming is the way in which methods are invoked. When a message is sent to an object, it is not necessary for the message to instruct the object how to perform a certain method. It is only necessary to request that the object execute the method. This greatly simplifies program development.

15

Object-oriented programming languages are predominantly based on a "class" scheme. The class-based object-oriented programming scheme is generally described in Lieberman, "Using Prototypical Objects to Implement Shared Behavior in Object-Oriented Systems," OOPSLA 86 Proceedings, September 1986, pp. 214-223.

20

A class defines a type of object that typically includes both variables and methods for the class. An object class is used to create a particular instance of an object. An instance of an object class includes the variables and methods defined for the class. Multiple instances of the same class can be created from an object

25

class. Each instance that is created from the object class is said to be of the same type or class.

To illustrate, an employee object class can include "name" and "salary" instance variables and a "set_salary" method. Instances of the employee object class can be created, or instantiated for each employee in an organization. Each object instance is said to be of type "employee." Each employee object instance includes "name" and "salary" instance variables and the "set_salary" method. The values associated with the "name" and "salary" variables in each employee object instance contain the name and salary of an employee in the organization. A message can be sent to an employee's employee object instance to invoke the "set_salary" method to modify the employee's salary (i.e., the value associated with the "salary" variable in the employee's employee object).

A hierarchy of classes can be defined such that an object class definition has one or more subclasses. A subclass inherits its parent's (and grandparent's etc.) definition. Each subclass in the hierarchy may add to or modify the behavior specified by its parent class. Some object-oriented programming languages support multiple inheritance where a subclass may inherit a class definition from more than one parent class. Other programming languages support only single inheritance, where a subclass is limited to inheriting the class definition of only one parent class. The Java™ programming language also provides a mechanism known as an "interface" which comprises a set of constant and abstract method declarations. An object class can implement the abstract methods defined in an interface. Both single and multiple inheritance are available to an interface. That is, an interface can inherit an interface definition from more than one parent interface.

An object is a generic term that is used in the object-oriented programming environment to refer to a module that contains related code and variables. A software application can be written using an object-oriented programming language whereby the program's functionality is implemented using objects.

Java™ Programming and Execution

A Java™ program is composed of a number of classes and interfaces. Unlike many programming languages, in which a program is compiled into machine-dependent, executable program code, Java™ classes are compiled into machine independent bytecode class files. Each class contains code and data in a platform-independent format called the class file format. The computer system acting as the execution vehicle contains a program called a virtual machine, which is responsible for executing the code in Java™ classes. The virtual machine provides a level of abstraction between the machine independence of the bytecode classes and the machine-dependent instruction set of the underlying computer hardware. A "class loader" within the virtual machine is responsible for loading the bytecode class files as needed, and either an interpreter executes the bytecodes directly, or a "just-in-time" (JIT) compiler transforms the bytecodes into machine code, so that they can be executed by the processor.

Sample Java™ Network Application Environment

25

Figure 1 is a block diagram illustrating a sample Java™ network environment comprising a client platform 102 coupled over a network 101 to a

server 100 for the purpose of accessing Java™ class files for execution of a Java™ application or applet.

In Figure 1, server 100 comprises Java™ development environment 104
 5 for use in creating the Java™ class files for a given application. The Java™ development environment 104 provides a mechanism, such as an editor and an applet viewer, for generating class files and previewing applets. A set of Java™ core classes 103 comprise a library of Java™ classes that can be referenced by source files containing other/new Java™ classes. From Java™ development
 10 environment 104, one or more Java™ source files 105 are generated. Java™ source files 105 contain the programmer readable class definitions, including data structures, method implementations and references to other classes. Java™ source files 105 are provided to Java™ compiler 106, which compiles Java™ source files 105 into compiled ".class" files 107 that contain bytecodes executable
 15 by a Java™ virtual machine. Bytecode class files 107 are stored (e.g., in temporary or permanent storage) on server 100, and are available for download over network 101.

Client platform 102 contains a Java™ virtual machine (JVM) 111 which,
 20 through the use of available native operating system (O/S) calls 112, is able to execute bytecode class files and execute native O/S calls when necessary during execution.

Java™ class files are often identified in applet tags within an HTML
 25 (hypertext markup language) document. A web server application 108 is executed on server 100 to respond to HTTP (hypertext transport protocol) requests containing URLs (universal resource locators) to HTML documents, also referred to as "web pages." When a browser application executing on client

platform 102 requests an HTML document, such as by forwarding URL 109 to web server 108, the browser automatically initiates the download of the class files 107 identified in the applet tag of the HTML document. Class files 107 are typically downloaded from the server and loaded into virtual machine 111
 5 individually as needed.

It is typical for the classes of a Java™ program to be loaded as late during the program's execution as possible; they are loaded on demand from the network (stored on a server), or from a local file system, when first referenced
 10 during the Java™ program's execution. The virtual machine locates and loads each class file, parses the class file format, allocates memory for the class's various components, and links the class with other already loaded classes. This process makes the code in the class readily executable by the virtual machine.

15 Embodiment Of Computer Execution Environment

An embodiment of the invention can be implemented as computer software in the form of computer readable program code executed on a general purpose computer such as computer 200 illustrated in Figure 2, or in the form of
 20 bytecode class files executable by a virtual machine running on such a computer. A keyboard 210 and mouse 211 are coupled to a bi-directional system bus 218. The keyboard and mouse are for introducing user input to the computer system and communicating that user input to central processing unit (CPU) 213. Other suitable input devices may be used in addition to, or in place of, the mouse 211
 25 and keyboard 210. I/O (input/output) unit 219 coupled to bi-directional system bus 218 represents such I/O elements as a printer, A/V (audio/video) I/O, etc.

Computer 200 includes a video memory 214, main memory 215 and mass storage 212, all coupled to bi-directional system bus 218 along with keyboard 210, mouse 211 and CPU 213. The mass storage 212 may include both fixed and removable media, such as magnetic, optical or magnetic optical storage systems or any other available mass storage technology. Bus 218 may contain, for example, thirty-two address lines for addressing video memory 214 or main memory 215. The system bus 218 also includes, for example, a 32-bit data bus for transferring data between and among the components, such as CPU 213, main memory 215, video memory 214 and mass storage 212. Alternatively, multiplex data/address lines may be used instead of separate data and address lines.

In one embodiment of the invention, the CPU 213 is a microprocessor manufactured by Motorola®, such as the 680X0 processor or a microprocessor manufactured by Intel®, such as the 80X86, or Pentium® processor, or a SPARC® microprocessor from Sun Microsystems®. However, any other suitable microprocessor or microcomputer may be utilized. Main memory 215 is comprised of dynamic random access memory (DRAM). Video memory 214 is a dual-ported video random access memory. One port of the video memory 214 is coupled to video amplifier 216. The video amplifier 216 is used to drive the cathode ray tube (CRT) raster monitor 217. Video amplifier 216 is well known in the art and may be implemented by any suitable apparatus. This circuitry converts pixel data stored in video memory 214 to a raster signal suitable for use by monitor 217. Monitor 217 is a type of monitor suitable for displaying graphic images.

Computer 200 may also include a communication interface 220 coupled to bus 218. Communication interface 220 provides a two-way data communication

coupling via a network link 221 to a local network 222. For example, if communication interface 220 is an integrated services digital network (ISDN) card or a modem, communication interface 220 provides a data communication connection to the corresponding type of telephone line, which comprises part of network link 221. If communication interface 220 is a local area network (LAN) card, communication interface 220 provides a data communication connection via network link 221 to a compatible LAN. Wireless links are also possible. In any such implementation, communication interface 220 sends and receives electrical, electromagnetic or optical signals which carry digital data streams representing various types of information.

Network link 221 typically provides data communication through one or more networks to other data devices. For example, network link 221 may provide a connection through local network 222 to host computer 223 or to data equipment operated by an Internet Service Provider (ISP) 224. ISP 224 in turn provides data communication services through the world wide packet data communication network now commonly referred to as the "Internet" 225. Local network 222 and Internet 225 both use electrical, electromagnetic or optical signals which carry digital data streams. The signals through the various networks and the signals on network link 221 and through communication interface 220, which carry the digital data to and from computer 200, are exemplary forms of carrier waves transporting the information.

Computer 200 can send messages and receive data, including program code, through the network(s), network link 221, and communication interface 220. In the Internet example, server 226 might transmit a requested code for an application program through Internet 225, ISP 224, local network 222 and communication interface 220.

The received code may be executed by CPU 213 as it is received, and/or stored in mass storage 212, or other non-volatile storage for later execution. In this manner, computer 200 may obtain application code in the form of a carrier
5 wave.

The computer systems described above are for purposes of example only. An embodiment of the invention may be implemented in any type of computer system or programming or processing environment.
10

Thus, a method and apparatus for providing timely delivery of a bytecode stream has been described in conjunction with one or more specific embodiments. The invention is defined by the claims and their full scope of equivalents.

CLAIMS

We claim:

1. A method configured to include bytecode within a transport
5 stream, said method comprising:
 examining delimiters in said transport stream to determine a
 position of available space,
 embedding bytecode in one or more positions of available space.
- 10 2. The method of claim 1 wherein said stream comprises one or more
transport stream packets, said one or more packets having a header, said
method comprising the step of:
 embedding bytecode in one or more transport stream packet
 headers;
- 15 3. The method of claim 2 wherein said packets comprise a header
and a payload, said method comprising:
 embedding bytecode in one or more transport stream packet
 payloads.
- 20 4. The method of claim 2 wherein said packets comprise a header
having a delimiter indicating whether or not a payload is attached to said header,
said method comprising:
 examining a delimiter;
25 embedding bytecode in one or more headers ;
 embedding bytecode in one or more payloads if delimiter indicates
 that a payload is not attached.

5. A method configured to include bytecode within a transport stream comprising:

- 5 obtaining a data packet having a header and a data storage segment;
- embedding bytecode in said header;

6. A method configured to include bytecode within a transport stream comprising:

- 10 obtaining a data packet having a header and a data storage segment;
- embedding bytecode in said data storage segment;

7. A method configured to transmit and retransmit bytecode comprising:

- 15 transmitting data through the method of claim 6;
- retransmitting data through the method of claim 2.

8. A system comprising:

- 20 a processor;
- a memory;
- code executed by said processor configured to include bytecode within a transport stream; said code comprising
- a method examining delimiters in said transport stream to determine a position of available space;
- 25 a method embedding bytecode in one or more positions of available space.

9. The system of claim 8 wherein said stream comprises one or more transport stream packets, said one or more packets having a header, said code comprising:

5 a method embedding bytecode in one or more transport stream packet headers.

10. The system of claim 9, wherein said packets comprise a header and a payload, said code comprising:

10 a method embedding bytecode in one or more transport stream packet payloads.

11. The system of claim 9, wherein said packets comprise a header having a delimiter indicating whether or not a payload is attached to said header, said code comprising:

15 a method examining a delimiter;
 a method embedding bytecode in one or more headers;
 a method embedding bytecode in one or more payloads if
 delimiter indicates that a payload is not attached.

20 12. A system comprising:
 a processor;
 a memory;
 code executed by said processor configured to include bytecode within a transport stream; said code comprising:

25 a method obtaining a data packet having a header and a data storage segment;
 a method embedding bytecode in said header.

13. A system comprising:

a processor;

a memory;

code executed by said processor configured to include bytecode

5 within a transport stream; said code comprising:

a method obtaining a data packet having a header and a

data storage segment;

a method embedding bytecode in said storage segment.

10 14. A computer program product comprising:

a computer usable medium having computer readable program
code embodied therein configured to deliver bytecode; said computer
program comprising:

15 computer readable code configured to cause a computer to
examine delimiters in said transport stream to determine a position
of available space;

computer readable code configured to cause a computer to
embed bytecode in one or more positions of available space.

20 15. The computer program product of claim 14 wherein said stream
comprises one or more transport stream packets, said one or more packets
having a header, said computer program comprising:

computer readable code configured to cause a computer to embed
bytecode in one or more transport stream packet headers.

25

16. The computer program product of claim 15, wherein said packets comprise a header and a payload, said computer program comprising:

computer readable code configured to cause a computer to embed bytecode in one or more transport stream packet payloads.

5

17. The computer program product of claim 15, wherein said packets comprise a header having a delimiter indicating whether or not a payload is attached to said header, said computer program comprising:

computer readable code configured to examine a delimiter;

10 computer readable code configured to embed bytecode in one or more headers;

computer readable code configured to embed bytecode in one or more payloads if delimiter indicates that a payload is not attached.

15 18. A computer program product comprising:

a computer usable medium having computer readable program code embodied therein configured to deliver bytecode; said computer program product comprising:

20 computer readable code configured to cause a computer to obtain a data packet having a header and a data storage segment;

computer readable code configured to cause a computer to embed bytecode in said header.

19. A computer program product comprising:

a computer usable medium having computer readable program code embodied therein configured to deliver bytecode; said computer program product comprising:

5 computer readable code configured to cause a computer to obtain a data packet having a header and a data storage segment; computer readable code configured to cause a computer to embed bytecode in said header.

20. A computer program product comprising:

a computer usable medium having computer readable program code embodied therein configured to deliver bytecode; said computer program product comprising:

15 computer readable code configured to cause a computer to obtain a data packet having a header and a data storage segment; computer readable code configured to cause a computer to embed bytecode in said header.

21. A computer program product comprising:

20 a computer usable medium having computer readable program code embodied therein configured to deliver bytecode; said computer program product comprising:

computer readable code configured to cause a computer to transmit data through the method of claim 20;

25 computer readable code configured to cause a computer to retransmit data through the method of claim 19.

WO 00/33532

PCT/US99/27722

1/6

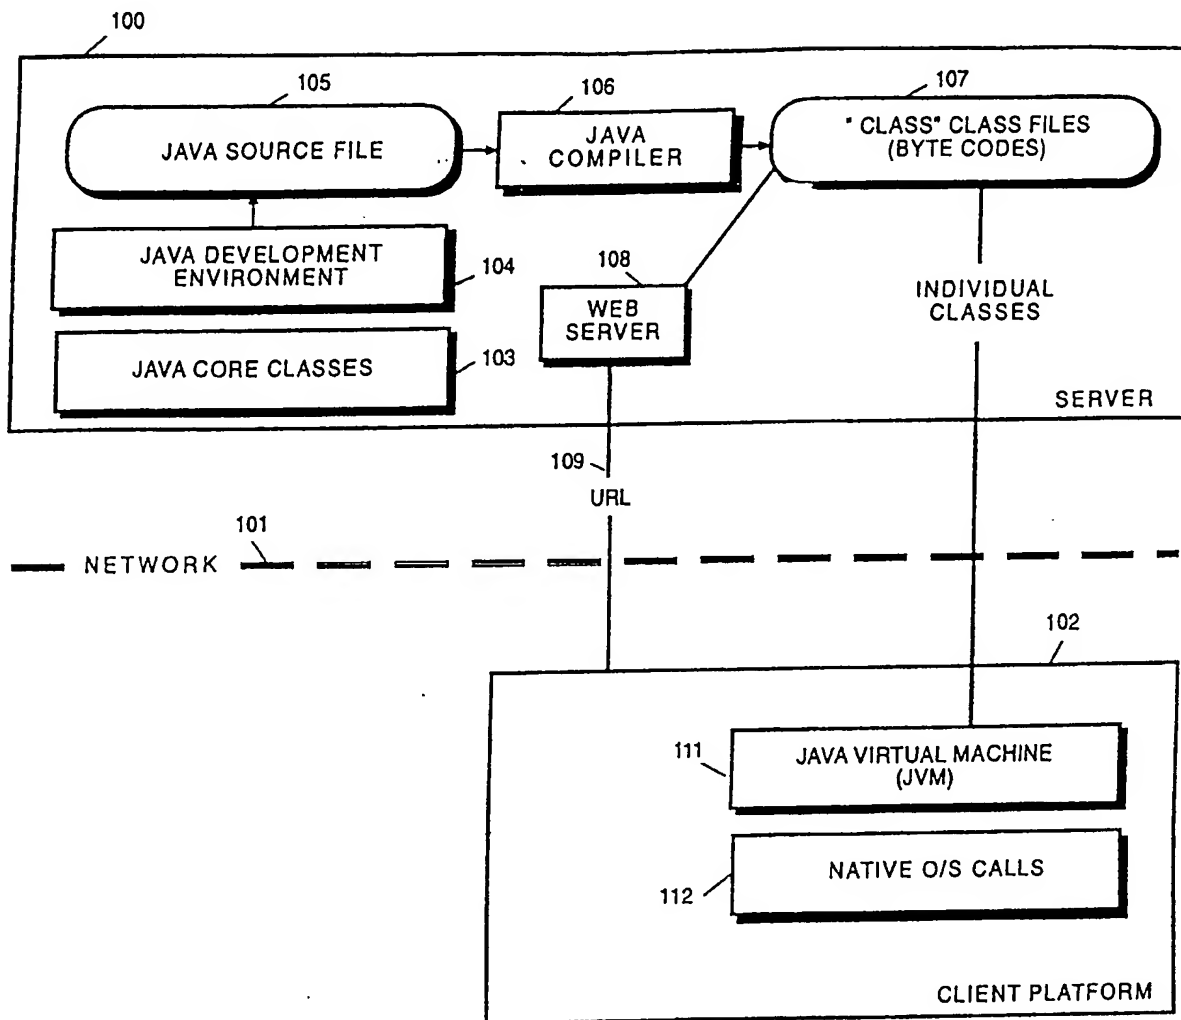


FIG. 1

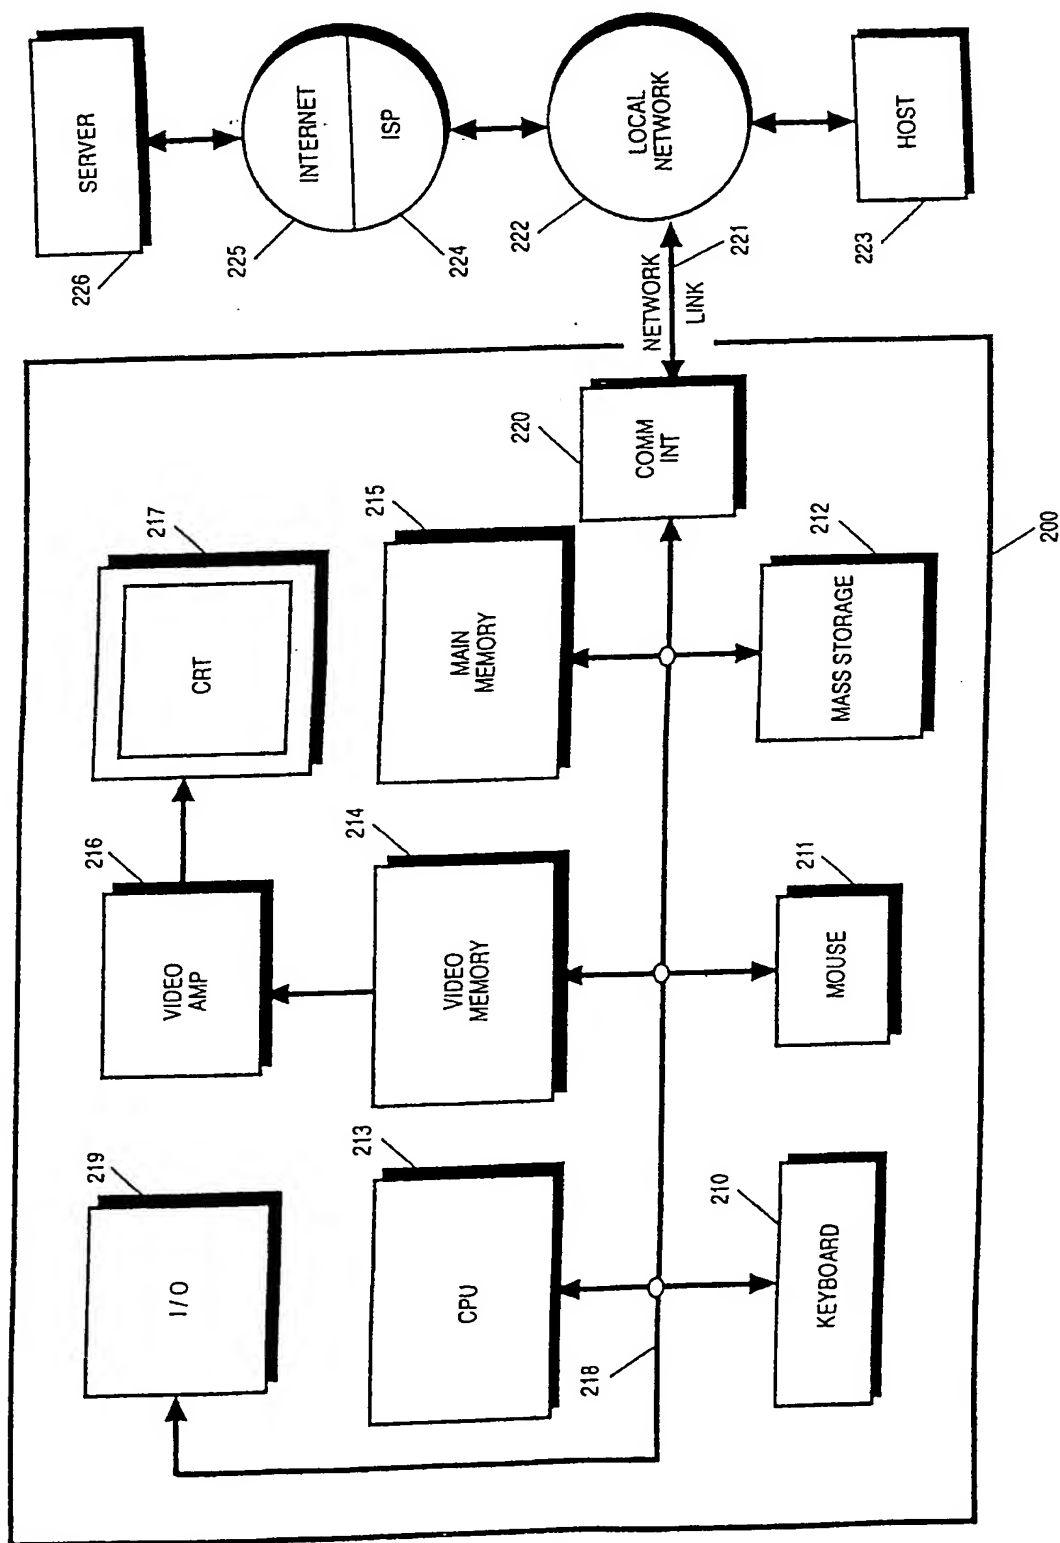


FIG. 2

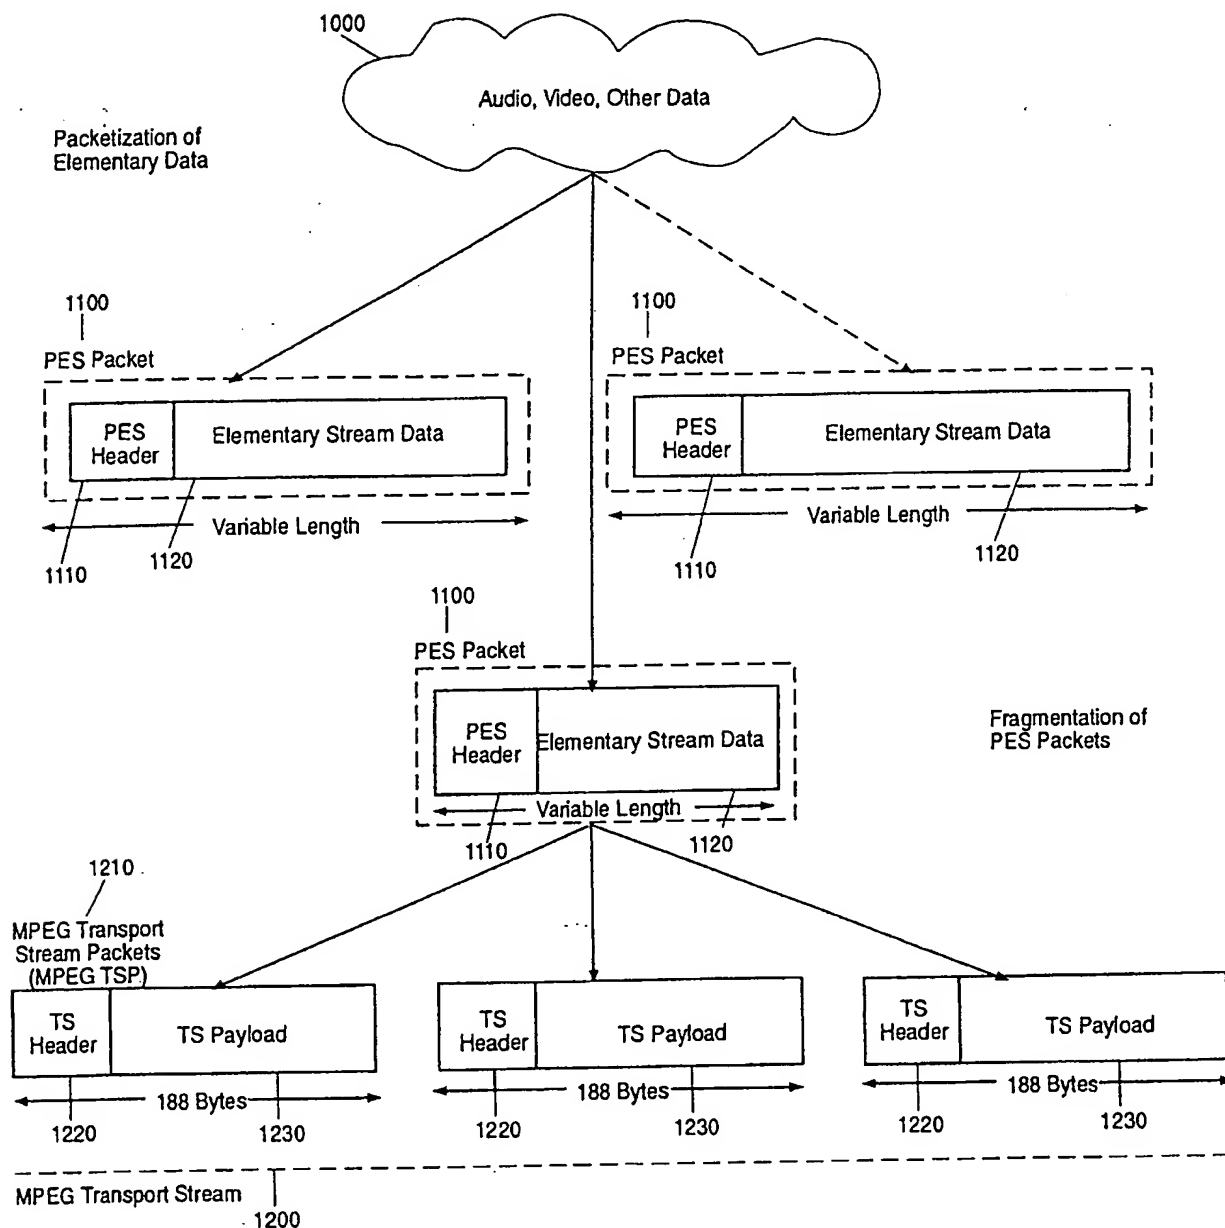


FIG. 3

WO 00/33532

PCT/US99/27722

4/6

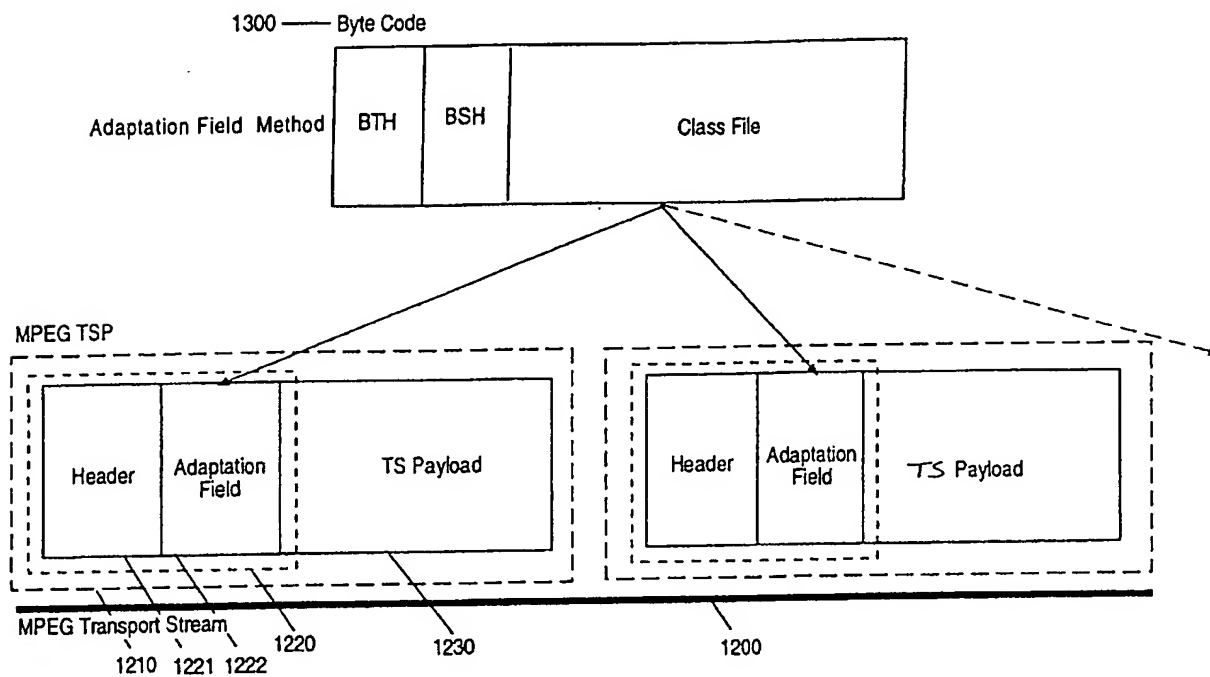


FIG. 4

FIG. 5


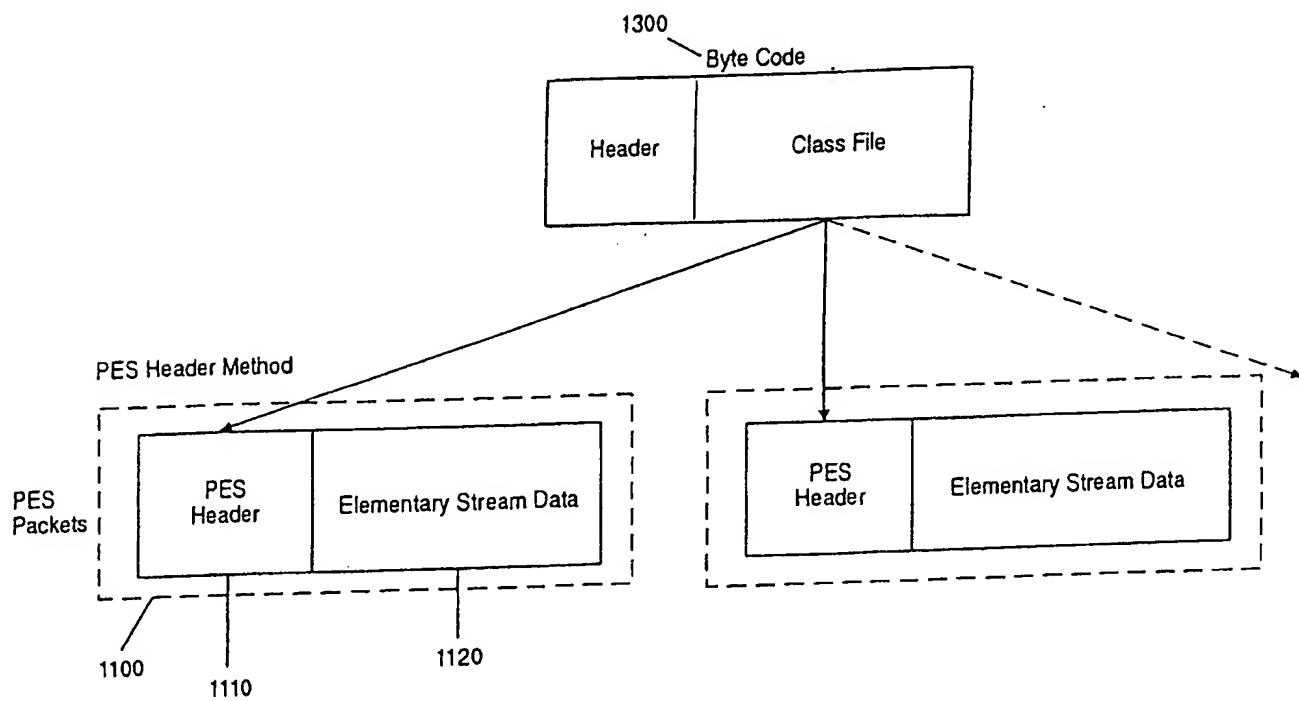


FIG. 6



UNITED STATES PATENT AND TRADEMARK OFFICE

UNITED STATES DEPARTMENT OF COMMERCE
United States Patent and Trademark Office
Address: COMMISSIONER FOR PATENTS
P.O. Box 1450
Alexandria, Virginia 22313-1450
www.uspto.gov

COPY

U.S. APPLICATION NUMBER NO. 11/547,386	FIRST NAMED APPLICANT Timothy T. CRANE	ATTY. DOCKET NO. 06077P
INTERNATIONAL APPLICATION NO. PCT/US05/10779		
I.A. FILING DATE 03/31/2005		PRIORITY DATE 04/05/2004

27804
HOLLAND & BONZAGNI, P.C.
171 DWIGHT ROAD, SUITE 302
LONGMEADOW, MA 01106-1700

Received

APR 19 2008

CONFIRMATION NO. 3183
371 FORMALITIES LETTER

Holland & Bonzagni, P.C.

Date Mailed: 04/17/2008

NOTIFICATION OF MISSING REQUIREMENTS UNDER 35 U.S.C. 371 IN THE UNITED STATES DESIGNATED/ELECTED OFFICE (DO/EO/US)

The following items have been submitted by the applicant or the IB to the United States Patent and Trademark Office as an Elected Office (37 CFR 1.495):

- Priority Document
- Copy of the International Application filed on 10/02/2006
- Copy of the International Search Report filed on 10/02/2006
- Information Disclosure Statements filed on 03/14/2008
- Oath or Declaration filed on 10/02/2006
- Request for Immediate Examination filed on 10/02/2006
- Copy of references cited in ISR filed on 03/14/2008
- U.S. Basic National Fees filed on 10/02/2006
- Priority Documents filed on 10/02/2006

The applicant needs to satisfy supplemental fees problems indicated below.

The following items **MUST** be furnished within the period set forth below in order to complete the requirements for acceptance under 35 U.S.C. 371:

- Oath or declaration of the inventors, in compliance with 37 CFR 1.497(a) and (b), identifying the application by the International application number and international filing date. The current oath or declaration does not comply with 37 CFR 1.497(a) and (b) in that it:
 - is not executed in accordance with either 37 CFR 1.66 or 37 CFR 1.68.
- To avoid abandonment, a surcharge (for late submission of filing fee, search fee, examination fee or oath or declaration) as set forth in 37 CFR 1.492(h) of \$130 for a non-small entity, must be submitted with the missing items identified in this letter.

SUMMARY OF FEES DUE:

Total additional fees required for this application is **\$130** for a Large Entity:

- **\$130** Surcharge.

ALL OF THE ITEMS SET FORTH ABOVE MUST BE SUBMITTED WITHIN TWO (2) MONTHS FROM THE DATE OF THIS NOTICE OR BY 32 MONTHS FROM THE PRIORITY DATE FOR THE APPLICATION, WHICHEVER IS LATER. FAILURE TO PROPERLY RESPOND WILL RESULT IN ABANDONMENT.

The time period set above may be extended by filing a petition and fee for extension of time under the provisions of 37 CFR 1.136(a).

Applicant is reminded that any communications to the United States Patent and Trademark Office must be mailed to the address given in the heading and include the U.S. application no. shown above (37 CFR 1.5)


Registered users of EFS-Web may alternatively submit their reply to this notice via EFS-Web.
<https://sportal.uspto.gov/authenticate/AuthenticateUserLocalEPF.html>

For more information about EFS-Web please call the USPTO Electronic Business Center at 1-866-217-9197 or visit our website at <http://www.uspto.gov/ebc>.

If you are not using EFS-Web to submit your reply, you must include a copy of this notice.

SHAKEEL AHMED

Telephone: (703) 308-9140 EXT 208



Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it contains a valid OMB control number.

PTO/SB/01 (07-06)

Approved for use through 01/31/2007. OMB 0651-0032
U.S. Patent and Trademark Office; U.S. DEPARTMENT OF COMMERCE

**DECLARATION FOR UTILITY OR
DESIGN
PATENT APPLICATION
(37 CFR 1.63)**

☐

Declaration
Submitted
With Initial
Filing

OR

☒

Declaration
Submitted after Initial
Filing (surcharge
(37 CFR 1.16 (e))
required)

Attorney Docket
Number

06077P

First Named Inventor

Timothy T. Crane

COMPLETE IF KNOWN

Application Number

Unknown

Filing Date

October 2, 2006

Art Unit

Unknown

Examiner Name

Unknown

I hereby declare that:

Each inventor's residence, mailing address, and citizenship are as stated below next to their name.

I believe the inventor(s) named below to be the original and first inventor(s) of the subject matter which is claimed and for which a patent is sought on the invention entitled:

COUNTERFEIT-RESISTANT, METAL-FORMED IMAGES AND SECURITY DEVICES AND SECURITY DOCUMENTS EMPLOYING SAME

(Title of the Invention)

the specification of which

☐

is attached hereto

OR

☒

was filed on (MM/DD/YYYY)

03/31/2005

as United States Application Number or PCT International

Application Number

PCT/US05/010779

and was amended on (MM/DD/YYYY)

09/26/2005

(if applicable).

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment specifically referred to above.

I acknowledge the duty to disclose information which is material to patentability as defined in 37 CFR 1.56, including for continuation-in-part applications, material information which became available between the filing date of the prior application and the national or PCT international filing date of the continuation-in-part application.

I hereby claim foreign priority benefits under 35 U.S.C. 119(a)-(d) or (f), or 365(b) of any foreign application(s) for patent, inventor's or plant breeder's rights certificate(s), or 365(a) of any PCT international application which designated at least one country other than the United States of America, listed below and have also identified below, by checking the box, any foreign application for patent, inventor's or plant breeder's rights certificate(s), or any PCT international application having a filing date before that of the application on which priority is claimed.

Prior Foreign Application Number(s)	Country	Foreign Filing Date (MM/DD/YYYY)	Priority Not Claimed	Certified Copy Attached?	
				YES	NO
60/559,583	US	04/05/2004	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>
			<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
			<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
			<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

☐

Additional foreign application numbers are listed on a supplemental priority data sheet PTO/SB/02B attached hereto.

[Page 1 of 2]

This collection of information is required by 35 U.S.C. 115 and 37 CFR 1.63. The information is required to obtain or retain a benefit by the public which is to file (and by the USPTO to process) an application. Confidentiality is governed by 35 U.S.C. 122 and 37 CFR 1.11 and 1.14. This collection is estimated to take 21 minutes to complete, including gathering, preparing, and submitting the completed application form to the USPTO. Time will vary depending upon the individual case. Any comments on the amount of time you require to complete this form and/or suggestions for reducing this burden, should be sent to the Chief Information Officer, U.S. Patent and Trademark Office, U.S. Department of Commerce, P.O. Box 1450, Alexandria, VA 22313-1450. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Commissioner for Patents, P.O. Box 1450, Alexandria, VA 22313-1450.

If you need assistance completing the form, call 1-800-PTO-9199 and select option 2.

[06077P02]

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it contains a valid OMB control number.

DECLARATION — Utility or Design Patent Application

Direct all correspondence to:



The address associated with Customer Number.

27,804

OR ☐

Correspondence address below

Name

Address

City

State

ZIP

Country

Telephone

Email

WARNING:

Petitioner/applicant is cautioned to avoid submitting personal information in documents filed in a patent application that may contribute to identity theft. Personal information such as social security numbers, bank account numbers, or credit card numbers (other than a check or credit card authorization form PTO-2038 submitted for payment purposes) is never required by the USPTO to support a petition or an application. If this type of personal information is included in documents submitted to the USPTO, petitioners/applicants should consider redacting such personal information from the documents before submitting them to the USPTO. Petitioner/applicant is advised that the record of a patent application is available to the public after publication of the application (unless a non-publication request in compliance with 37 CFR 1.213(a) is made in the application) or issuance of a patent. Furthermore, the record from an abandoned application may also be available to the public if the application is referenced in a published application or an issued patent (see 37 CFR 1.14). Checks and credit card authorization forms PTO-2038 submitted for payment purposes are not retained in the application file and therefore are not publicly available.

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under 18 U.S.C. 1001 and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

NAME OF SOLE OR FIRST INVENTOR:

A petition has been filed for this unsigned inventor

Given Name (first and middle (if any))

Timothy T.

Family Name or Surname

Crane

Inventor's Signature

Date

11/22/06

Residence: City

Windsor

State

MA

Country

US

Citizenship

US

Mailing Address

860 Crane Road

City

Windsor

State

MA

Zip

01270

Country

US



Additional inventors or a legal representative are being named on the 1 supplemental sheet(s) PTO/SB/02A or 02LR attached hereto.

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it contains a valid OMB control number.

DECLARATION**ADDITIONAL INVENTOR(S)**


Supplemental Sheet

Page 1 of 1

Name of Additional Joint Inventor, if any:		<input type="checkbox"/> A petition has been filed for this unsigned inventor	
Given Name (first and middle (if any))		Family Name or Surname	
Karin		Morck-Hamilton	
Inventor's Signature <i>Karin Morck-Hamilton</i>		Date <i>11/20/2006</i>	
Residence: City	State	Country	Citizenship
Stockholm SE			
Renstiernas Gata 14			
Mailing Address			
City	State	Zip	Country
Stockholm		11628	SE
Name of Additional Joint Inventor, if any:		<input type="checkbox"/> A petition has been filed for this unsigned inventor	
Given Name (first and middle (if any))		Family Name or Surname	
Inventor's Signature		Date	
Residence: City	State	Country	Citizenship
Mailing Address			
City	State	Zip	Country
Name of Additional Joint Inventor, if any:		<input type="checkbox"/> A petition has been filed for this unsigned inventor	
Given Name (first and middle (if any))		Family Name or Surname	
Inventor's Signature		Date	
Residence: City	State	Country	Citizenship
Mailing Address			
City	State	Zip	Country

This collection of information is required by 35 U.S.C. 115 and 37 CFR 1.63. The information is required to obtain or retain a benefit by the public which is to file (and by the USPTO to process) an application. Confidentiality is governed by 35 U.S.C. 122 and 37 CFR 1.11 and 1.14. This collection is estimated to take 21 minutes to complete, including gathering, preparing, and submitting the completed application form to the USPTO. Time will vary depending upon the individual case. Any comments on the amount of time you require to complete this form and/or suggestions for reducing this burden, should be sent to the Chief Information Officer, U.S. Patent and Trademark Office, U.S. Department of Commerce, P.O. Box 1450, Alexandria, VA 22313-1450. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Commissioner for Patents, P.O. Box 1450, Alexandria, VA 22313-1450.

If you need assistance in completing the form, call 1-800-PTO-9199 (1-800-786-9199) and select option 2.



PTO/SB/81 (01-06)

Approved for use through 12/31/2008. OMB 0651-0035
U.S. Patent and Trademark Office, U.S. DEPARTMENT OF COMMERCE
Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

**POWER OF ATTORNEY
and
CORRESPONDENCE ADDRESS
INDICATION FORM**

Application Number	Unknown
Filing Date	October 2, 2006
First Named Inventor	Timothy T. Crane
Title	COUNTERFEIT-RESISTANT...
Art Unit	Unknown
Examiner Name	Unknown
Attorney Docket Number	06077P

I hereby revoke all previous powers of attorney given in the above-identified application.

I hereby appoint:

☒ Practitioners associated with the Customer Number:

27,804

OR

☐ Practitioner(s) named below:

Name	Registration Number

as my/our attorney(s) or agent(s) to prosecute the application identified above, and to transact all business in the United States Patent and Trademark Office connected therewith.

Please recognize or change the correspondence address for the above-identified application to:

☒ The address associated with the above-mentioned Customer Number:

OR

☐ The address associated with Customer Number:

OR

☐ Firm or
Individual Name

Address

City

State

Zip

Country

Telephone

Email

I am the:

☒ Applicant/Inventor.

☐ Assignee of record of the entire interest. See 37 CFR 3.71.
Statement under 37 CFR 3.73(b) is enclosed. (Form PTO/SB/96)

SIGNATURE of Applicant or Assignee of Record

Signature		Date	12 March 2007
Name	Timothy T. Crane	Telephone	
Title and Company			


NOTE: Signatures of all the inventors or assignees of record of the entire interest or their representative(s) are required. Submit multiple forms if more than one signature is required, see below.

☒ *Total of 2 forms are submitted.

This collection of information is required by 37 CFR 1.31, 1.32 and 1.33. The information is required to obtain or retain a benefit by the public which is to file (and by the USPTO to process) an application. Confidentiality is governed by 35 U.S.C. 122 and 37 CFR 1.11 and 1.14. This collection is estimated to take 3 minutes to complete, including gathering, preparing, and submitting the completed application form to the USPTO. Time will vary depending upon the individual case. Any comments on the amount of time you require to complete this form and/or suggestions for reducing this burden, should be sent to the Chief Information Officer, U.S. Patent and Trademark Office, U.S. Department of Commerce, P.O. Box 1450, Alexandria, VA 22313-1450. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Commissioner for Patents, P.O. Box 1450, Alexandria, VA 22313-1450.

If you need assistance in completing the form, call 1-800-PTO-9199 and select option 2.

[06077P03]



Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

PTO/SB/81 (01-06)
Approved for use through 12/31/2008. OMB 0651-0035
U.S. Patent and Trademark Office; U.S. DEPARTMENT OF COMMERCE

**POWER OF ATTORNEY
and
CORRESPONDENCE ADDRESS
INDICATION FORM**

Application Number	Unknown
Filing Date	October 2, 2006
First Named Inventor	Timothy T. Crane
Title	COUNTERFEIT-RESISTANT...
Art Unit	Unknown
Examiner Name	Unknown
Attorney Docket Number	06077P

I hereby revoke all previous powers of attorney given in the above-identified application.

I hereby appoint:

☒ Practitioners associated with the Customer Number:

27,804

OR

☐ Practitioner(s) named below:

Name	Registration Number

as my/our attorney(s) or agent(s) to prosecute the application identified above, and to transact all business in the United States Patent and Trademark Office connected therewith.

Please recognize or change the correspondence address for the above-identified application to:

☒ The address associated with the above-mentioned Customer Number:

OR

☐ The address associated with Customer Number:

OR

<input type="checkbox"/> Firm or Individual Name			
Address			
City	State	Zip	
Country			
Telephone			Email

I am the:

☒ Applicant/Inventor.

☐ Assignee of record of the entire interest. See 37 CFR 3.71.
Statement under 37 CFR 3.73(b) is enclosed. (Form PTO/SB/96)

SIGNATURE of Applicant or Assignee of Record

Signature	<i>Karin Morck-Hamilton</i>	Date	11-20-2006
Name	Karin Morck-Hamilton	Telephone	
Title and Company			

NOTE: Signatures of all the inventors or assignees of record of the entire interest or their representative(s) are required. Submit multiple forms if more than one signature is required, see below*.

☒ *Total of 2 forms are submitted.

This collection of information is required by 37 CFR 1.31, 1.32 and 1.33. The information is required to obtain or retain a benefit by the public which is to file (and by the USPTO to process) an application. Confidentiality is governed by 35 U.S.C. 122 and 37 CFR 1.11 and 1.14. This collection is estimated to take 3 minutes to complete, including gathering, preparing, and submitting the completed application form to the USPTO. Time will vary depending upon the individual case. Any comments on the amount of time you require to complete this form and/or suggestions for reducing this burden, should be sent to the Chief Information Officer, U.S. Patent and Trademark Office, U.S. Department of Commerce, P.O. Box 1450, Alexandria, VA 22313-1450. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Commissioner for Patents, P.O. Box 1450, Alexandria, VA 22313-1450.

If you need assistance in completing the form, call 1-800-PTO-9199 and select option 2.